

10/031872

2100 Pennsylvania Avenue, NW

Washington, DC 20037-3213

202.293.7060

202.293.7860



SUGHRUE MION, PLLC

531 Rec'd PCT/PT

24 JAN 2002

www.sughrue.com

January 24, 2002

BOX PCT

Commissioner for Patents

Washington, D.C. 20231

PCT/ES/00277

-filed July 27, 2000

Re: Application of Josep FONTDECABA BUJ
 ANTI-ROLLING AND ANTI-PITCHING SYSTEM FOR A MOTOR VEHICLE, AND
 DEVICE FOR ITS IMPLEMENTATION
 Our Ref: Q68112

Dear Sir:

The following documents and fees are submitted herewith in connection with the above application for the purpose of entering the National stage under 35 U.S.C. § 371 and in accordance with the Patent Cooperation Treaty:

- ☒ an executed Declaration and Power of Attorney.
- ☒ an English translation of the International Application.
- ☒ ten (10) sheets of drawings.
- ☒ an English translation of Article 34 amendments.
- ☒ a Preliminary Amendment

It is assumed that copies of the International Application, the International Search Report, the International Preliminary Examination Report, and any Articles 19 and 34 amendments as required by § 371(c) will be supplied directly by the International Bureau, but if further copies are needed, the undersigned can easily provide them upon request.

Applicant claims benefit of small entity status in accordance with 37 CFR § 1.27.

The Government filing fee is calculated as follows (**Small Entity fees apply**):

Total claims	18	-	20	=		x	\$9.00	=	\$0.00
Independent claims	1	-	3	=		x	\$42.00	=	\$0.00
Base Fee									\$445.00

TOTAL FEE\$445.00

A check for the statutory filing fee of \$445.00 is attached. You are also directed and authorized to charge or credit any difference or overpayment to Deposit Account No. 19-4880. The Commissioner is hereby authorized to charge any fees under 37 C.F.R. §§ 1.16, 1.17 and 1.492 which may be required during the entire pendency of the application to Deposit Account No. 19-4880. A duplicate copy of this transmittal letter is attached.

Priority is claimed from:

<u>Country</u>	<u>Application No</u>	<u>Filing Date</u>
Spain	9901725	July 30, 1999

Respectfully submitted,

Robert J. Seas, Jr.
 Registration No. 21,092

RJS/amt

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Josep FONTDECABA BUJ

Appln. No.: PCT/ES00/00277

Confirmation No.: Not Yet Assigned

Group Art Unit: Not Yet Assigned

Filed: January 24, 2002

Examiner: Not Yet Assigned

For: ANTI-ROLLING AND ANTI-PITCHING SYSTEM FOR A MOTOR VEHICLE, AND DEVICE FOR ITS IMPLEMENTATION

PRELIMINARY AMENDMENT

Commissioner for Patents
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please enter the following amended claims:


10.- Device, as in claim 5, wherein flow regulation and two-way damping means (67) are inserted in the conduits that connect the central device with each of the hydraulic rams at the wheels, or in the conduits between hydraulic rams of conjugated wheels.

14.- Device, as in claim 6, wherein some means are provided to introduce pressurized gaseous or hydraulic fluid in the central cavity, or drain it, with the purpose of varying the average distance between the wheels and the vehicle body.

REMARKS

Entry and consideration of this Amendment is respectfully requested.

Respectfully submitted,


Robert L. Seas, Jr.
Registration No. 21,092

SUGHRUE MION, PLLC
2100 Pennsylvania Avenue, N.W.
Washington, D.C. 20037-3213
Telephone: (202) 293-7060
Facsimile: (202) 293-7860
RJS/amt
Date: January 24, 2002

APPENDIX

VERSION WITH MARKINGS TO SHOW CHANGES MADE

IN THE CLAIMS:

The claims are amended as follows:

10.- Device, as in claims 5 ~~or~~ 6, wherein flow regulation and two-way damping means (67) are inserted in the conduits that connect the central device with each of the hydraulic rams at the wheels, or in the conduits between hydraulic rams of conjugated wheels.

14.- Device, as in claim 6 ~~and~~ 8, wherein some means are provided to introduce pressurized gaseous or hydraulic fluid in the central cavity, or drain it, with the purpose of varying the average distance between the wheels and the vehicle body.

02-10-2001

ES0000277

10/031872

10/PRTS

531 Rec'd PCT/P 24 JAN 2002

- 1 -

ANTIROLL AND ANTI-PITCH SYSTEM FOR A VEHICLE, AND
DEVICE FOR ITS IMPLEMENTATION

DESCRIPTION

5

Field of the Invention

This invention relates to an antiroll and anti-pitch system for a vehicle, and to the devices for its implementation, specifically a system to be applied to vehicles provided with wheeling sets, specially four of them, each constituted by one or more wheels, such system that cooperating with the vehicle suspension system or substituting it, allows that the wheeling sets keep contact with the ground and an even distribution of load even in the case of uneven terrain, being such wheeling sets related two to two in diagonal direction, in such a way that the loads created by the vertical movements of one of the wheeling sets are transmitted to the opposite wheeling set in order to transmit such a force that creates a similar movement in the vertical direction of such wheeling set, so as that cooperating with the suspension of the vehicle or substituting it, allow that all wheels keep contact with the ground even if it is irregular and do not induce unwanted effects on an uneven terrain.

Vehicle suspension is built mainly with coil springs and resilient elements that bear the vehicle body, transmitting its weight and the inertial forces to the wheeling sets, providing the means to absorb the shakes caused by the travel of the vehicle over the road Irregularities. Such springs and elastic elements are accompanied with shock absorbers in order to model the sprung movements and avoid prolonged oscillations.

In addition to absorbing vibrations or shocks from the road surface, a vehicle suspension must provide security of ride, keeping an optimal position in the straight trajectory, and vehicle security during cornering.

Vehicle stability is strongly related with the oscillations of the vehicle body along its course, or when it experiences roll, heading and spin

AMENDED SHEET

Empfangszeit 2.0KT. 11:14

02-10-2001

ES0000277

- 2 -

movements in addition to rebounds. Such oscillations have to be absorbed to increment the stability and comfort of vehicle ride.

State of the art

5

Stabilizing bars are well-known means used to control the roll naturally generated when the a vehicle is in operation.

Conventional anti-roll system uses a stabilizing bar that has a small resilient component to get the adequate comfort along the ride, but then it cannot accomplish its purpose satisfactorily when the vehicle turns, being this caused by the centrifugal force generated when cornering.

On the contrary, if the anti-roll bar is very stiff, it will interfere with the suspension system and will deteriorate the comfort of the vehicle ride.

We have knowledge of existing U.S. patents 2.840.387 in which the forces created in a vehicle wheel as it turns are transmitted by two tie-rods to the diagonally opposed wheel, which reproduces the force in the same direction, 3.147.990 in which the wheels on one side of the vehicle are connected to each other and to those on the other side by means of torque arms, 3.992.026, where right and left torsion bars that generally extend in the longitudinal direction, interconnect the right and left sides of existing front anti-roll bar with right and left rear suspension arms respectively, 5.505.479 where two front suspension lower arms transversally aligned between opposite front and rear wheels, and related between them by a resilient element located longitudinally, all this with the purpose of transforming the vertical movements of the wheels into a rotary motion as seen from the front of the vehicle, and 5.882.017, where a perpendicular connecting rod coupled to the vehicle and a pair of articulating elements that link such connecting rod to the front wheels, including a pair of travel limits selectively actuated that communicate with the central part of such connecting rod.

We also have knowledge of patents ES 2110 509 in which the forces created in one wheel are transmitted hydraulically to the diagonally opposed wheel, using double-effect hydraulic cylinders, WO 95/23076 in

AMENDED SHEET

Fmdfangszeit 7. Okt. 11:14

- 2a -

which, similar to the above, the forces created in one wheel are transmitted to the diagonally opposed wheel by means of double-effect cylinders and, in one case, the single-effect cylinders connect the wheels on one side to each other and to a central device, FR 1.535.641. US 3.752.497 and US 5.447.332 where double acting hydraulic rams are used on each wheel
5 related two-to-two, having the last two patents a central device that relates the four wheels and includes a double or triple hydraulic cylinder where some linked pistons move in the same direction.

10 Summary of the invention

02-10-2001

- 3 -

All known anti-roll devices interfere at certain extent with the existing suspension, as they have to show a critical resiliency to suit stability and adaptability to uneven terrains.

Therefore, it is desired an anti-roll system, and also an anti-pitch
5 device that would not interfere in geometric terms with the existing suspension system, and that can cooperate with or substitute it, being able to show an arbitrary rigidity without compromising the vehicle stability.

With such premises, it has been developed the anti-roll and anti-pitch device for a vehicle that constitutes the object of present invention,
10 consisting this device in the arrangement between the wheeling sets related through interaction means that receive the effect from one or more wheeling set and adequate them before transmitting it to the other wheeling sets in order to maintain a uniform load distribution of the weight and reduce the vehicle pitching and rolling.

The invention assumes that the transmission of the forces created by the vertical movements from one wheeling set to the diagonally opposite one implemented through mechanical means able to resiliently resist forces of traction, compression, torsion and flexion, through hydraulic means, through pneumatic means or through electrical or electronic means
15 used to command servo actuators on each wheel, being these means considered either separately or any of their combinations.

According to the above-mentioned possibilities of implementing the system, the invention includes several cases of proper devices to implement the current system.

As in this invention, an anti-roll and anti-pitch device for a vehicle comprises a receiving element that associated with a first wheeling set of the vehicle, transmits the wheel vertical movements to a direct transforming element that converts them into horizontal movements, which in turn, through an inverse transforming element, these horizontal movements are
25 converted into vertical movements that take effect onto a second wheeling set diagonally opposed to the first, causing a vertical movement analogous to the one in the first wheeling set.
30

AMENDED SHEET

Empfangszeit 7.Okt. 11:14

In all these cases, the direct transforming element is related with the inverse transforming element by means of a transmission element that can be mechanical, hydraulic, pneumatic or electric.

One characteristic of this invention is the case where receiving and actuating elements are made of a rod connected on one end to one wheeling set through a universal joint, while the other end is articulated to a direct transforming element in the receiving end case, and to an inverse transforming element in the case of an actuating element. In this case, the direct transforming element is a first kind angled connecting rod, and the inverse transforming element is a second or third kind angled connecting rod, which pivot points are supported by the vehicle body through bearings.

According to this invention, the transmission means between pairs of direct and inverse transforming elements are made up by a rigid bar, connected at its ends with each transforming element. It has been anticipated too that the transmission means can be made of two flexible stays, in which case the two transforming elements are made of three arms connecting rods shaped as "T", with the pivot point near the intersection, the stays connected to the two ends of the shorter arms, and the third arm of both transforming elements working in the vertical direction.

It is also a characteristic of this invention that the resilient elements connected to the transmission elements are connected to the the vehicle body through an articulated balance beam, in such a way that the its ends are connected to the resilient elements and the center is joined to the vehicle body.

Another characteristic of this invention is that the receiving and actuating elements can be the rods of pistons of single effect hydraulic rams, which are in turn the direct and inverse transforming elements, related through hydraulic conduits.

In one case, the hydraulic circuit is constituted by the two single effect hydraulic cylinders, which are the direct, and inverse transforming elements, and a hydraulic conduit that includes an inserted actuating device to keep the pressure in the circuit.

It is also a characteristic of this invention that when each receiving and actuating device is made up of single effect rams, the direct and inverse transforming elements are organized through interaction means made up of a central device built as a hydraulic ram containing two
5 opposed concentric pistons with same areas each, and a spring or pressurized fluid acting in between of them, having each cylinder end a coaxial cylindrical compartment in correspondence with the active sections of such pistons, having each compartment a connection with the respective receiving or actuating element.

10 There is another preferred implementation where the interaction means that are related with each pair of wheeling sets is built as a central hydraulic device made of three concentric coupled cylinders, closed at the ends of the set, where the central cylinder is of a larger diameter, and the two cylinders at its sides are both of equal diameter, having inside the
15 cylinders two double-pistons, with no external rod, and one larger piston found inside the central cylinder, and a smaller piston in one of the smaller cylinders, in such a way as to determine five cavities: one central cavity, and two pairs of cavities at each side of the device separated by the smaller diameter pistons, being the double cavities at each end of the
20 device connected respectively to the hydraulic conduits corresponding to hydraulic single effect rams at each diagonally opposed wheeling set, while the central cavity is connected to an actuating device built with resilient means and/or a fluid susceptible of being connected to an expansion chamber that opposes to the two double pistons getting closer to each
25 other.

Another characteristic of the invention is that the central device central cylinder has an area approximately double to the areas of each side cylinder.

It is evident that with the appropriate modifications, such hydraulic
30 elements can be adapted to become of pneumatic type.

The invention anticipates that the resilient means in the central cavity are actually provided by two elastic elements, each actuating independently on each of the larger pistons that close such central cavity,

so the central hydraulic device is divided in two halves related through an additional conduit provided of flow regulation means.

Each double piston in the central hydraulic device can be built from two or more conventional pistons, linked with each other although actuating each one on independent hydraulic single effect rams, in such a way that the two or more new cavities of the new cylinders come to substitute the two pairs of cavities formerly separated by each piston of smaller diameter following the diagonal scheme, and linking the two groups of pistons through a resilient element acting as the former central cavity.

10 The invention contemplates the following facts:

- a) Hydraulic fluid regulation or damping devices are inserted in the hydraulic conduits from the central device to each hydraulic ram linked to the wheeling sets, or in between the cylinders associated to conjugated wheeling sets.
- 15 b) The central cavity, the two pairs of side cavities, the conduits that connect these with the hydraulic rams at each wheeling set, or the hydraulic cylinders can be connected to one or more expansion pneumatic chambers through electro valves.
- 20 c) The four conduits that connect the double side cavities from the central hydraulic device to each hydraulic ram at the wheeling sets is susceptible of being communicated through devices that allow a limited volume flow depending on the pressure differential between the
- 25 conduits, being these devices preferably applied between conduits to wheeling sets at the same side of the vehicle.

It is also possible to provide the means of introducing pressurized hydraulic or gaseous fluid in the central cavity, or drain it, with the purpose of varying the average distance between the wheels and the vehicle body.

30 For this purpose it can also be used a mechanical device to provide a thrust between the two larger diameter pistons found in the central cavity of the central hydraulic device.

- 7 -

Brief description of the drawings

FIG. 1 is a diagrammatic representation of the anti-roll and anti-pitch suspension device for a vehicle.

5 FIG. 2 is a diagrammatic representation of the device that relates two diagonally opposed wheels through a single push-pull strut.

FIG. 3 is a diagrammatic representation of the device that relates two diagonally opposed wheels through a single torsion bar.

10 FIG. 4 is a diagrammatic representation of the device that relates two diagonally opposed wheels through an articulated torsion bar.

FIG. 5 is a diagrammatic representation of the device that relates two diagonally opposed wheels through a pair of pull-only flexible stays.

FIG. 6 is a diagrammatic representation of the device that relates two diagonally opposed wheels through single effect hydraulic rams

15 FIG. 7 is a diagrammatic representation of the device that relates two diagonally opposed wheels through servo actuators and an electrical/electronic circuit.

FIG. 8 is a diagrammatic perspective representation of the transverse configuration for the wheels torsion bars related diagonally in pairs through two transmission bars crossing over at some point.

FIG. 9 is a diagrammatic perspective representation of rear side of configuration showed in FIG. 8 where such transmission bars are connected to the vehicle body through independent resilient elements.

25 FIG. 10 is a diagrammatic perspective zoomed representation of the resilient elements in FIG. 9.

FIG. 11 is a diagrammatic representation of a configuration similar to FIG. 9 where the independent resilient elements are placed at a mid point of the transmission bars.

30 FIG. 12 is a diagrammatic zoomed perspective representation of the configuration of FIG. 11.

FIG. 13 is a diagrammatic representation of a detail like FIG 12 where the two resilient elements are not independent and are related through a balance beam.

02-10-2001

- 8 -

FIG. 14 is a diagrammatic representation of a detail like FIG 10 where the two resilient elements are not independent and are related through a balance beam.

FIG. 15 is a diagrammatic perspective representation of transverse configuration based on torsion bars where the transmission bars are equally crossed and connected through a common resilient element in this case under compression.

FIG. 16 is a diagrammatic perspective representation of a longitudinal configuration based on torsion bars where the transmission bars are located transversely.

FIG. 17 is a diagrammatic perspective representation of a configuration for a four-wheel vehicle based on torsion bars related through crossed transmission connected to a common resilient element.

FIG. 18, 19 and 20 are is a diagrammatic perspective and zoomed representations of details of FIG 17.

FIG. 21 is a diagrammatic representation of a hydraulic device with simple effect rams applied to the four vehicle wheels.

FIG. 22 is a diagrammatic representation of a hydraulic device with simple effect rams applied to the four vehicle wheels.

FIG. 23 represents a section of the implementation of the central hydraulic device found in previous FIG. 22.

FIG 24 represents a perspective section of the implementation of the central hydraulic device found in FIG 22 and 23.

FIG 25 is a diagrammatic representation of an alternative implementation of the central hydraulic that has is functionally equivalent to the device represented in FIG 22 and 23.

FIG 26 is a diagrammatic representation of multiple expansion chambers that allows the adjustment of suspension stiffness.

FIG 27 is a diagrammatic representation of limited volume transfer to be inserted between two hydraulic circuits.

Detailed description

AMENDED SHEET

Empfangszeit 2.Okt. 11:14

- 9 -

The proposed anti-roll and anti-pitch suspension device relates, as represented in FIG 1, the pairs of diagonally opposed vehicle wheels, in such a way that the forces created by the vertical movements of one of them are transmitted to the conjugated wheel in order to communicate a force that determines analogous movements in the same vertical direction.

FIG 1 shows the front-left wheel A, front-right wheel B, rear-left wheel C and rear-right wheel D. The proposed system relates wheels A with D, and wheels B with C.

The axis of each wheel A, B, C and D is linked with a rigid element 1, which in turn is connected on wheels A and B to first kind connecting rods pivoting on 3, and on the other wheels to second or third connecting rod 4 pivoting on 5, being each connecting rod 2 related with connecting rod 4 diagonally opposite through a transmission element 6.

FIG. 2 shows how a vertical force F_B created by the terrain irregularities on the element 1 of wheel B is transformed through the corresponding connecting rod 2 into a non vertical force F that goes to the corresponding connecting rod 4 and gets transformed into a vertical force F_C analogous to F_B in direction and intensity.

The transmission of forces determined by the vertical movements in any of the two wheels of a diagonally opposed set is carried through mechanical means able to resiliently resist traction, compression, torsion and flexion forces, hydraulic and/or pneumatic means, and electric and/or electronic means that actuate through actuators on each wheel.

In general, this system can be implemented through a device as described below following again FIG 2.

The device has a rigid element 1 that related with a first vehicle wheel B transmits its vertical movements F_B to a direct transforming element such as connecting rod 2 that transforms them into horizontal or non-vertical movements, which in turn are transmitted through the elements 6 into an inverse transforming element such as connecting rod 4 that transforms these horizontal movements into vertical movements of the rigid actuating element 1 of a diagonally opposite second wheel C, subject then to a vertical movement analogous to the first wheel.

We have named receiving element or actuating element to the same rigid element 1, using the first meaning when this is the element that receives the terrain irregularity, and the second meaning when it actually transmits the movement to the wheel, so on both wheels receiving and actuating elements are the same. Analogously we can apply the same convention to the inverse and direct transforming elements.

In one of the implementations of this device, the rigid elements 1 acting as receiving or actuating element, are made up by an articulated connecting rod, linked through a joint 7 to one wheel at one end, and through a second joint 7 to a direct transforming element in the other end, being this transforming element made of a first kind angled connecting rod 2 when the rigid element 1 works as a receiver, and an inverse transforming element made of a second or third kind angled connecting rod 4 when the rigid element 1 works as an actuator.

The transmission means 6 are made up by: a rigid bar linked at each end to the transforming elements 2 and 4 as seen in FIG 1 and 2; a one-piece torsion bar 8 linked to the vehicle body at point 9 such as in FIG 3; by a torsion bar articulated through universal joints 10 as in FIG 4; and by two flexible pull-rods 11 as in FIG 5, where the two transforming elements are made of "T" shaped connecting rods 12 of three arms pivoting on 3 near the intersection, being the ends of the aligned arms connected to through joints 7 the ends of the crossing pull-rods 11, in such a way that the third arm actuates along the same vertical direction at each rigid element 1 working as receiving or actuating elements.

Another implementation of the invented device, as seen in figure 6, the rigid elements are the rods 13 connected to the pistons 14 of single effect hydraulic rams 15 mounted through a joint 15A to the vehicle body, being such pistons the direct and inverse transforming elements as shown in FIG 6, where the hydraulic rams 15 are related through conduits 16 that have an actuating device 17 that using hydraulic rams 18, elastic elements 19 and/or pneumatic means 20 keep the pressure in the circuit.

FIG 7 represents the case where each wheel has a conjugated pair of a servo actuator 21 related to a control unit 22.

-11-

As seen in FIG 8, direct and inverse transforming elements are made of torsion bars 23 with an arm 24 at each end; one connected to one wheel support 25, and the other to a transmission element 26. Such transmission elements 26 cross over in order to diagonally relate each conjugated pair of wheels.

As seen in FIG 9 and detail FIG 10, each transmission element 26 is connoted to the vehicle body through an elastic element such as a coil spring 27 placed between two brackets, one 28 fixed to the vehicle, and the other 29 fixed to the end of the transmission element.

The placement of coil springs 27 can be implemented as indicated in FIG 11 and 12, where the transmission elements 26 are made of two segments 26A and 26B joined at a plate 30 attached to a coil spring 27. Such spring is mounted between two brackets 28 and 29, the later fixed to a crossbeam 31 mounted on the vehicle body, having two rods 32 as a guide for the coil springs 27 and pushing ends 33 applied to the plates 30 that pass loosely through.

FIG 13 shows a configuration where the two coil springs 27 linked to the transforming elements 26 are related with the vehicle body through the balance beam 34, linked to the vehicle body through an axis going through the pivot point 35, and to the rods 32 at its ends, having like the previous case pushing ends 33.

FIG 14 shows a different configuration for balance beam 34 that has the brackets 28 and 29 at the ends of its arms with coil springs acting under compression like in FIG 9.

FIG 15, as in previous figures, shows the layout of the transforming elements 23 with a single compressing spring coil 27 that links the two crossing transmission elements 26 arranged in two parallel planes.

FIG 16 shows a layout where the direct and inverse transforming axis are arranged longitudinally in respect to the vehicle, and the transmission elements 26 are crossed in the transverse direction, having one single coil spring 27.

FIG 17 is a representation of a mechanical layout similar to FIG 15 where the transmission elements 26A and 26B are arranged on the same

AMENDED SHEET

Emfongorait 2 Okt 11:14

plane, side by side through the single coil spring 27 mounted between the brackets 37, each of them joined to fixtures 38 and 39 each linked to one transmission element 26A and 26B as shown in the detail view 19

As it can be seen in figures 18 and 20, the transmission elements
5 26A and 26B are crossed over by means of the connecting arms 23, so the arm 24B is related to arm 24C, and arm 24A to arm 24.

In this invention, the elastic elements connected to the vehicle body can be mounted on one or two mechanic, electro mechanic or hydraulic actuating elements such that their movement in respect to the vehicle body
10 varies its height in respect to the ground; the balance beam axis can be mounted on one or two mechanic, electro mechanic or hydraulic actuating elements such that their movement in respect to the vehicle body varies its height in respect to the ground; and the central resilient element can have a mechanic, electro mechanic or hydraulic actuating element able to move
15 one of the resilient element fixtures, in such a way that varies its effective length, and by so varies the height of the vehicle in respect to the ground.

FIG 21 shows a variation where each receiving and actuating element of the two pairs of vehicle wheels is made up by the rods 40 of pistons 41 of single effect hydraulic rams 42, the direct and inverse transforming elements are arranged in a unique central hydraulic cylinder
20 43 containing two free moving opposed pistons 44 showing active areas 45 equal and concentric, and are subject to an internal actuator made of a coil spring 46 and/or pressurized fluid 47, showing each piston outer side a cylindrical and coaxial compartment 49 and 50 that correspond to the active sections of such pistons, being each compartment 49 and 50 a
25 connection 51 towards the corresponding receiving and actuating element 40.

In the above implementation, the active central section of free-moving pistons 44 can be eliminated, acting as active area the inner face
30 where the coil spring is applied.

The actuating devices can be made up with a pair of single effect hydraulic rams as in FIG 6, with a common acting force. Such two cylinders can be concentric and of equal active area, be made up from three

cylinders where one is equivalent to the other two, or four equal rams arranged at the ends of a cross.

FIGs 22 and 23 represent a variation where the central hydraulic cylinder 43 is made up joining three hollow concentric cylinders, with a central cylinder 57 has a larger diameter, and the side cylinders 53 are the two equal and of smaller diameter, closed at their free ends 54. Inside such hollow body there are two free moving double pistons 55 made up one larger diameter piston 55A placed inside the larger central cylinder 52, and a smaller piston placed inside the corresponding end cylinder 53, thus determining one larger central cavity 56 associated to the central cylinder, 52, two smaller intermediate cavities 57 and 58, and two smaller ending cavities 59 and 60 associated to the side cylinders 53, all cavities connected in such a way that the smaller intermediate cavities 57 and 58 are respectively communicated with the simple effect hydraulic ram 42 for wheels B and A, while the smaller end cavities 59 and 60 are respectively communicated with the simple effect hydraulic ram 42 for wheels C and D, and the central cavity 56 has an actuating device made of resilient means such as pressurized fluid, coil spring or rubber-like body, the two last cases not represented in the figure. One preferable implementation of such central hydraulic device 43 is shown in figures 23 and 24.

Preferably, the area of the central cylinder 52 is approximately double the area of each side cylinders 53

The resilient means used in the actuator in the central cavity can be made of a double resilient element that independently pushes pistons 55A that close such larger central cavity 56. Another possibility is to divide the central hydraulic device 43 in two halves that can be related through an additional conduit that has means to regulate the flow of the fluid.

FIG 25 shows an arrangement of the central hydraulic cylinder 43, where each double piston 55 is made of two or more related pistons 63 in single effect hydraulic independent rams 64, with the purpose of two or more cavities of these new cylinders can substitute the two intermediate smaller cavities 57 and 58 and end cavities 59 and 60 that are separated by the smaller diameter pistons 55B, being all hydraulic conduits connected

following the exposed diagonal arrangement, and relating all the rods of the two groups of pistons 63 through a resilient element 66 acting as the actuating device used in the larger central cavity 56.

FIG 22 shows how two-way regulation or damping devices 67 are
5 inserted in the pipes connecting the central hydraulic device with all simple effect hydraulic cylinders 42 associated with the wheels. Additionally, the larger central cavity 56, the smaller intermediate cavities 57 and 58, the end cavities 59 and 60, the hydraulic conduits 61 that connect these with the hydraulic rams 42 associated to each wheel and the very hydraulic
10 rams 42 are connected to one or several pneumatic expansion chambers 68 that can be disconnected through electro valves 69 such as these represented in FIG. 26.

On the other side, the four main hydraulic conduits 61 that connect the smaller cavities 57, 58, 59 and 60 of the central hydraulic device 43
15 with the simple effect hydraulic rams 42 associated to the wheels are susceptible to be connected among them through devices that allow the flowing of a limited quantity of fluid depending on the pressure differential between the hydraulic conduits. This communication is preferably applied between hydraulic conduits from wheels of the same side of the vehicle.
20 FIG 27 shows this device made up with a free-moving piston 70 between two coil springs inside cylinder 71.

It has also been anticipated having means to provide pressurized hydraulic or gaseous fluid or drain it from the larger central cavity 56 with the purpose of varying the average distance between the vehicle body and
25 the wheels. The same result is obtained including a mechanical device that pushes the two larger diameter pistons 55A placed in the central cavity 56 in the central hydraulic device 43.

Therefore cavity 56 can include one or various resilient elements that have one or various mechanical, hydraulically or electromechanical
30 actuators that can vary the average distance between the vehicle body and the ground.

Additionally it has been anticipated that each hydraulic conduit 61 is derived into one or more devices with a variable volume cavity such as that

the circuit pressure increases, it compresses a resilient or pneumatic element that facilitates the entry of hydraulic liquid in the cavity. Analogously, each hydraulic conduit can have one or more regulating devices or valves, passive or active for the hydraulic fluid.

5 This invention anticipates that one or more wheels are substituted by sets of wheels, each wheel has one single effect hydraulic ram, and all rams communicated among them and with the hydraulic conduit of the wheel set corresponding to the central hydraulic device. Such substitution can be applied to a caterpillar device.

10 The invention also contemplates the fact that when the wheeling sets are made up of more than one wheel, each with the corresponding single-effect hydraulic ram, all the hydraulic rams are connected to each other and to the hydraulic central dvice through the conduit corresponding to such wheeling set.

15

- 16 -

CLAIMS

1.- Anti-roll and anti-pitch device for a vehicle, specifically to be applied to vehicles with wheeling sets, specially four, each wheeling set made up by one or more wheels, such device that cooperating with the suspension of the vehicle or substituting it, allows that the wheeling sets keep contact with the ground and a uniform load distribution even with an irregular terrain and comprise receiving element (1) associated with one wheeling set transmits its vertical forces to a direct transforming element (2) from these vertical forces into horizontal forces, which in turn are transmitted to an inverse transforming element (4) from the horizontal forces into vertical forces that operate on an actuating element (1) associated to a second wheeling set diagonally opposite in respect to the first where it creates a vertical force analogous to the former in the first wheeling set, characterized by the connection of such transmission means to the vehicle body through a resilient element (27) that together with the transmission means resiliency provides the suspension main resilient component.

2.- Device, as in claim 1 wherein the resilient elements connected to the transmission means (26) are connected to the vehicle body through a balance beam (34) in such a way that the ends of this beam equal arms are connected to each resilient element (27), and the central axis (35) is connected to the vehicle body.

3.- Device, as in claim 1, wherein the direct transforming elements (23) are placed on the wheeling sets of one side of the vehicle, and the inverse transforming elements are placed in the wheeling sets of the other side of the vehicle, having a resilient element (27) that connects the two transmission means (26) in such a way that together with the transforming element and transmission means resiliency, it provides the suspension main resiliency component.

4.- Device, as claimed in claim 1, wherein the vertical forces detected in the wheeling sets work on an electronic interaction means (22) where the transmission means are electrical conduits that operate the servo actuators (21) individually related with the wheeling sets.

- 17 -

5.- Device, as claimed in claim 1, wherein the transmission means of forces are hydraulic circuits connected to single effect hydraulic rams on each diagonally opposed wheel, with each conduit connected to a pneumatic cavity as to provide some resilient component individual to the wheel, and a central device that allow parallel forces of the hydraulic fluid, which forces are transmitted to a central resilient element connected to the vehicle body that can be a third pneumatic cavity or a resilient component, that together with the transmission means resiliency provides the suspension main resilient component.

6.- Device, as claimed in claim 5 wherein the two central devices are connected through a conduit or built together so as to connect the two resilient elements that operate on the two sets of diagonal transmission elements in such a way that the two central resilient elements act together, and with the resilient elements on each single effect ram connected to the wheels of the vehicle.

7.- Device, as in claim 5, where the central device is made up by a longitudinal set of two hollow concentric and coupled cylinders (52 and 53) of different diameters, closed at the ends (54) of that set, finding inside one free-moving double piston (55) with the larger diameter piston (55A) inside the larger central cylinder, and the smaller diameter piston (55B) in the corresponding smaller cylinder (53) therefore determining three cavities, one central cavity, and two side cavities being the smaller and central cavities connected to the hydraulic conduits (61) corresponding to the single effect hydraulic rams (42) of two diagonally opposed wheeling sets, while the side cavity on the larger cylinder incorporates an operating device made up of resilient elements (46) and/or a fluid (62) susceptible of being communicated with an expansion chamber (56) that opposes to the vertical movements of the diagonally opposed pistons get closer.

8.- Device, as in claim 6, where the two central devices are built together on a hydraulic central device (43) made up by a longitudinal set of three hollow concentric and coupled cylinders (52 and 53) closed at the ends (54) of that set, where the central cylinder (52) is of larger diameter and the side cylinders (53) are both equal and of a smaller diameter, finding inside two free-moving double pistons (55) with one larger diameter piston (55A) inside

- 18 -

the larger central cylinder, and one smaller diameter piston (55B) in the corresponding side cylinder (53) therefore determining five cavities (56, 57, 58, 59 and 60), one central cavity, and two double cavities at each side of the set separated by the smaller diameter pistons, being these double cavities at the ends connected to the hydraulic conduits (61) corresponding to the single effect hydraulic rams (42) of two diagonally opposed wheeling sets, while the central cavity incorporates an operating device made up of resilient elements (46) and/or a fluid (62) susceptible of being communicated with an expansion chamber (56) that opposes to such pistons get closer.

9.- Device, as in claim 7, wherein each double piston (55) in the central hydraulic device (43) is substituted by two or more conventional pistons, linked with each other but working in independent single effect hydraulic rams in such a way that two or more cavities of the new rams come to substitute cavities (57-59 and 58-60) that were separated by each smaller diameter piston (55B), connecting then to the hydraulic conduits (61) according to the diagonal layout, and joining the two groups of linked pistons through a resilient element (66) working as the central cavity means (56).

10.- Device, as in claims 5 and 6, wherein flow regulation and two-way damping means (67) are inserted in the conduits that connect the central device with each of the hydraulic rams at the wheels, or in the conduits between hydraulic rams of conjugated wheels.

11.- Device, as in claim 8, wherein the central cavity (56), the double side cavities (57-59 and 58-60), the conduits (61) between these cavities and the hydraulic rams (42) at the wheels and such hydraulic rams are connected to one or more pneumatic expansion chambers (68) through electro valves.

12.- Device, as in claim 8, wherein each conduit (61) between the hydraulic central device double side cavities and the single effect hydraulic rams (42) at the wheels can be connected to each other through devices (70, 71 and 72) that allow a limited volume flow depending on the pressure differential between such conduits

13.- Device, as in claim 5, wherein the connection between conduits is preferably applied to conduits to wheels of the same side of the vehicle

02-10-2001

ES0000277

- 19 -

14.- Device, as in claim 6 and 8, wherein some means are provided to introduce pressurized gaseous or hydraulic fluid in the central cavity, or drain it, with the purpose of varying the average distance between the wheels and the vehicle body.

5 15.- Device, as in claim 8, wherein a mechanical device provides the thrust between the two larger diameter pistons found in the central cavity of the central hydraulic device.

10 16.- Device, as in claim 8, wherein one or more devices provided with a variable volume cavity (61) are shunt connected to each hydraulic conduit such as that the circuit pressure increment compress a resilient or pneumatic element that allows fluid enter into such cavity.

17.- Device, as claimed in 8, wherein one or more devices (67) or passive or active regulating valves are inserted in each hydraulic conduit.

15 18.- Device, as claimed in 1, wherein some wheeling sets are substituted by a device that allows travelling movements such as caterpillars or tractor vehicles.

ABSTRACT

ANTIROLL AND ANTI-PITCH SYSTEM FOR A VEHICLE, AND DEVICE FOR
ITS IMPLEMENTATION

5



This antiroll and anti-pitch system for a vehicle, and the device for its implementation that cooperates the vehicle suspension or substituting it, allows that the wheeling sets keep contact with the ground and a uniform load distribution even when the case of an irregular terrain, being such wheeling sets related two-to-two in
10 a diagonal arrangement through interaction means that receive the thrust of one or more wheeling sets and adapt them to transmit them to the other wheeling set, with the purpose of maintaining the uniform load distribution and reduce the roll and heading of the vehicle.

10

15

The vertical forces detected in the wheeling sets work through mechanic, hydraulic or electric means made up by mechanic resilient elements, hydraulic and/or pneumatic elements and electronic devices.

Fig. 15



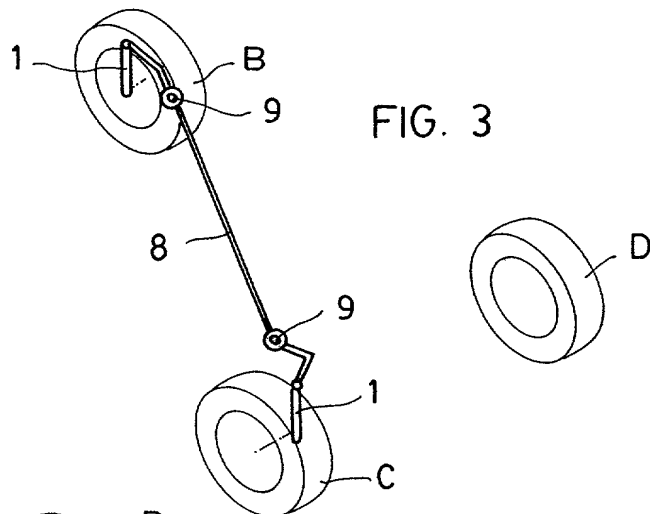


FIG. 3

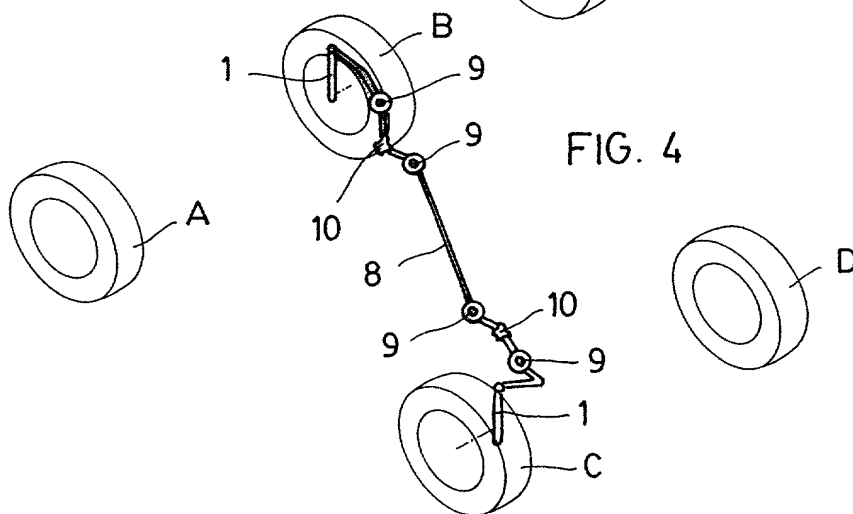


FIG. 4

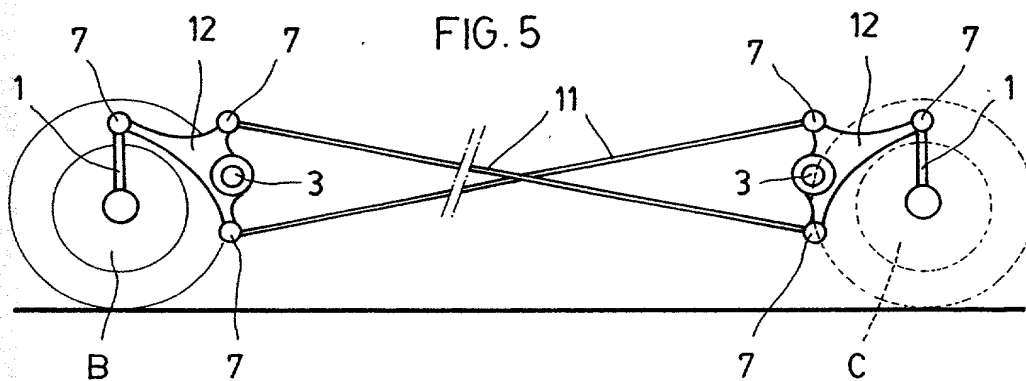


FIG. 5

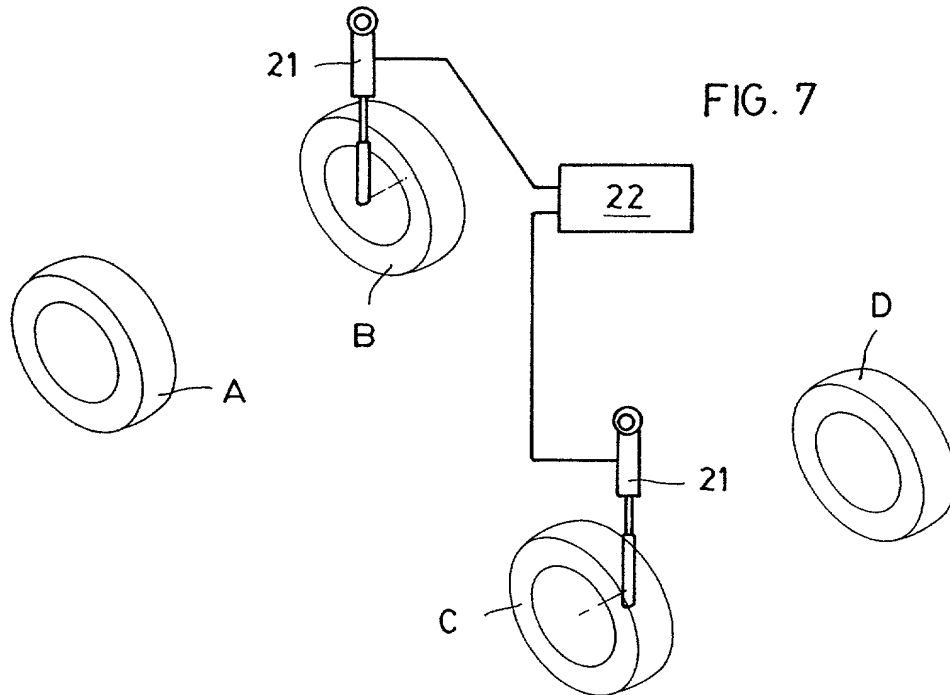
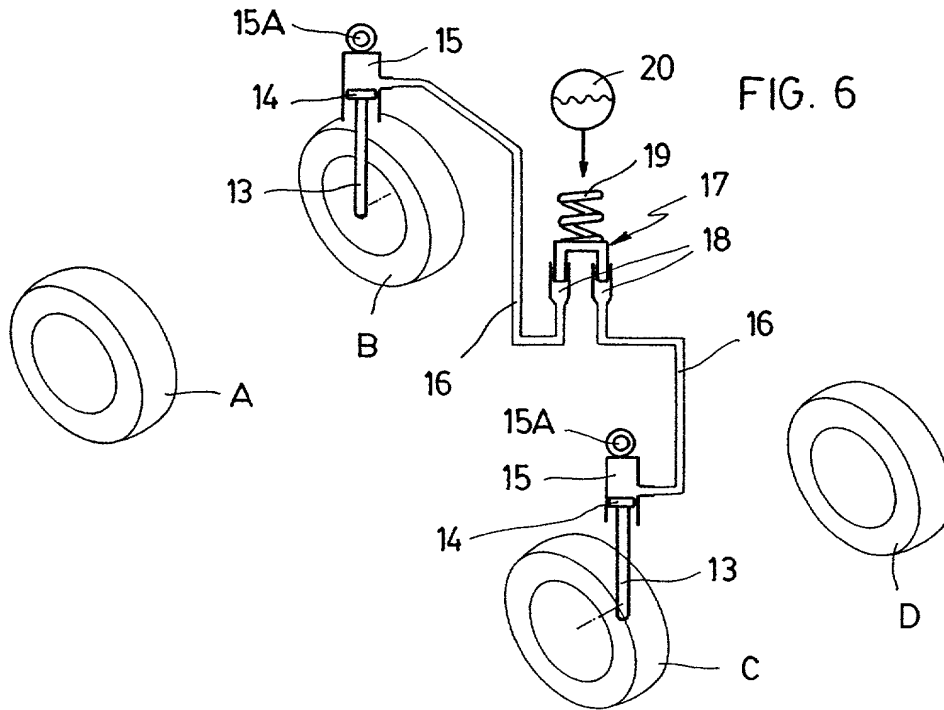


FIG. 8

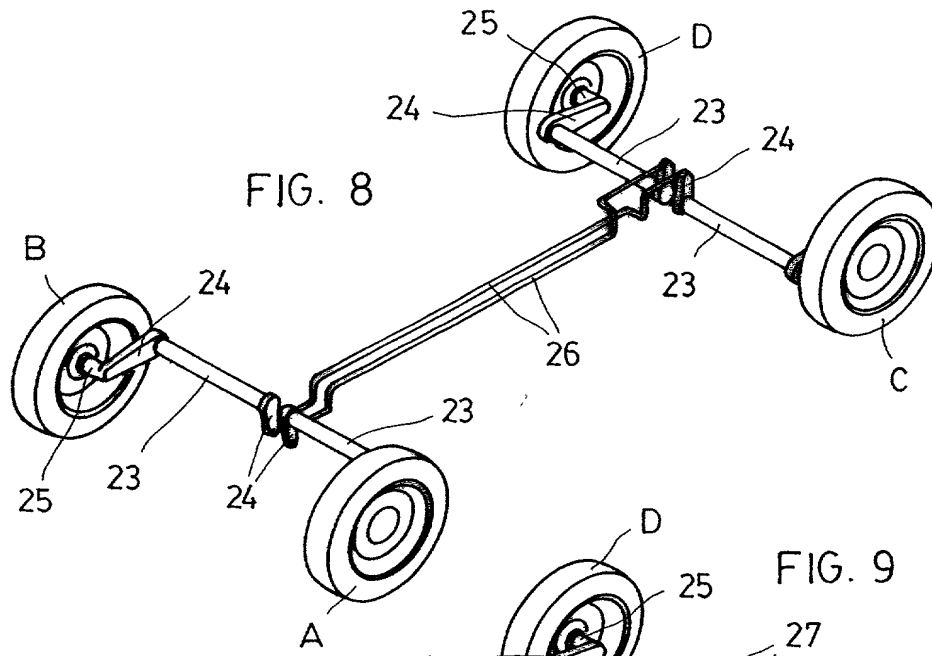


FIG. 9

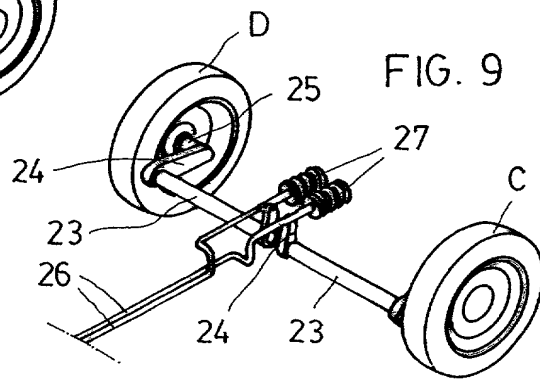
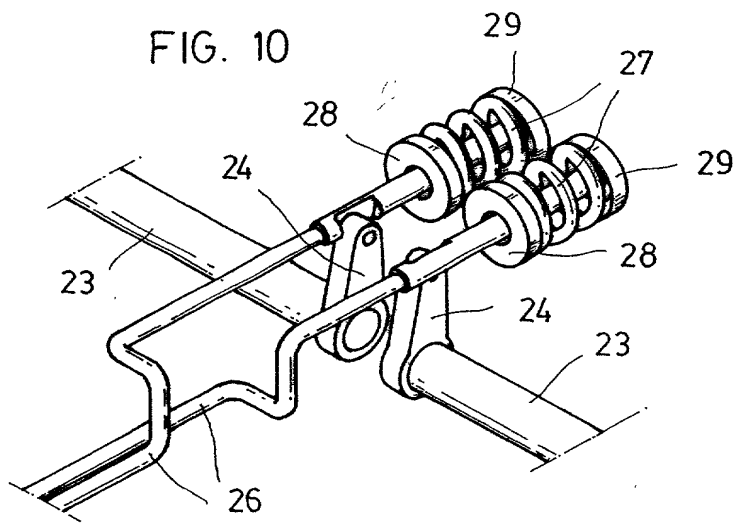
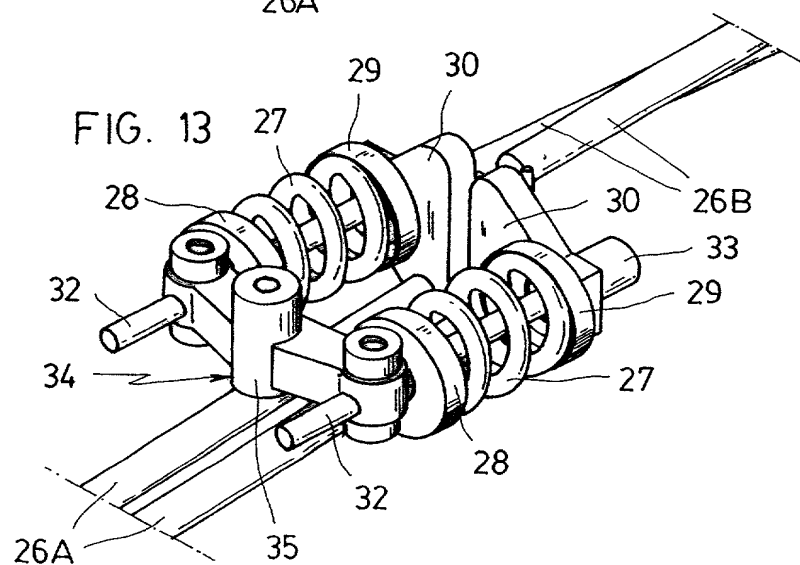
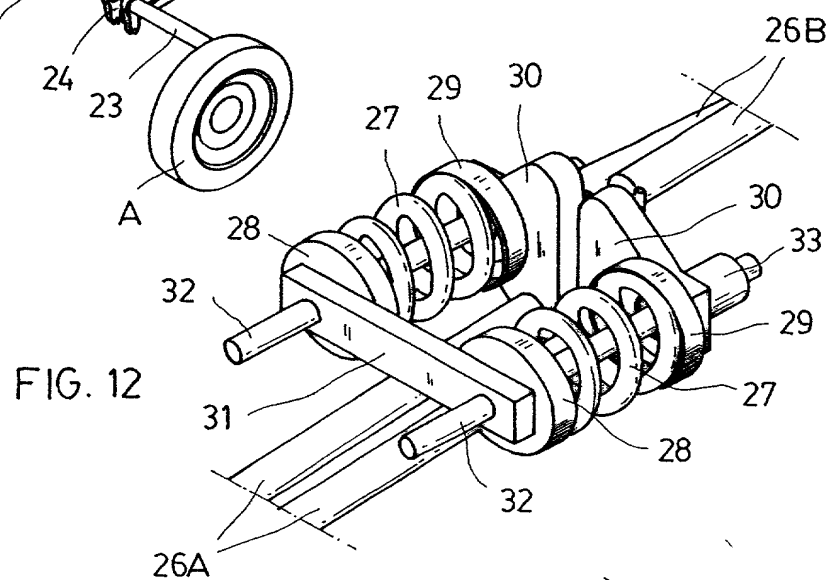
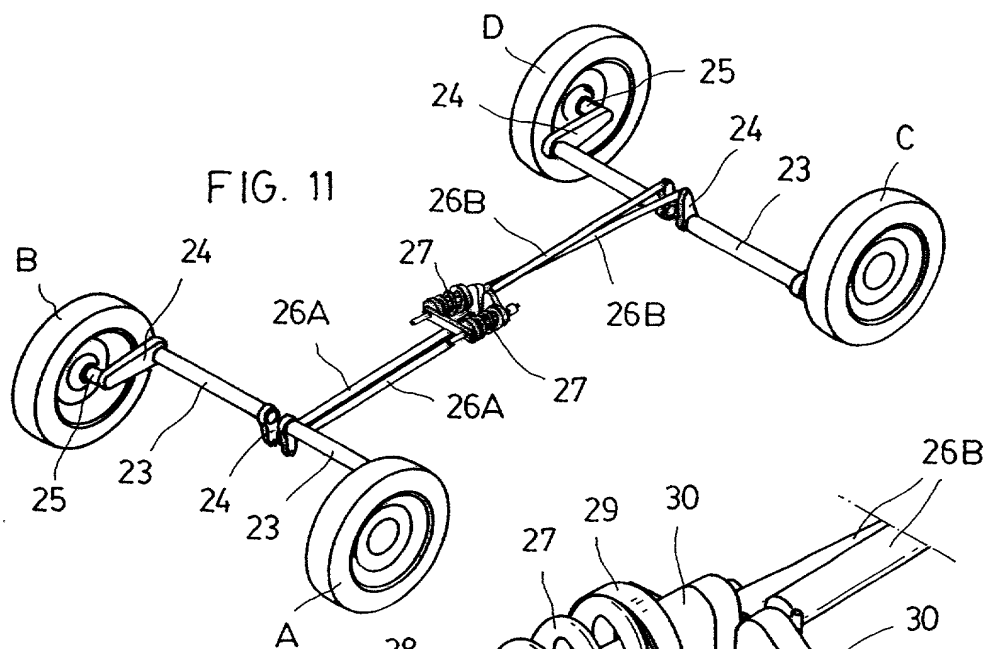


FIG. 10





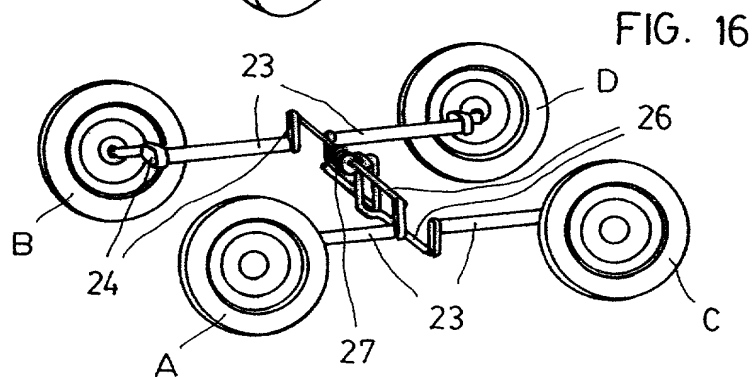
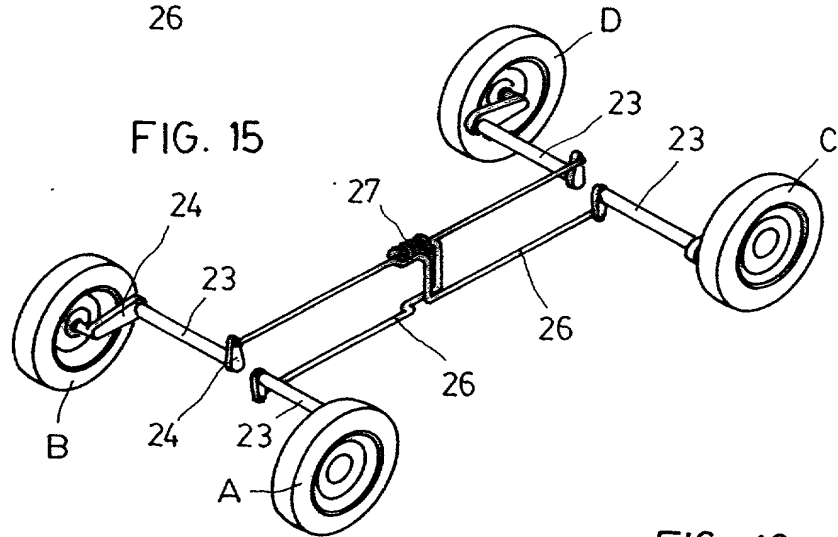
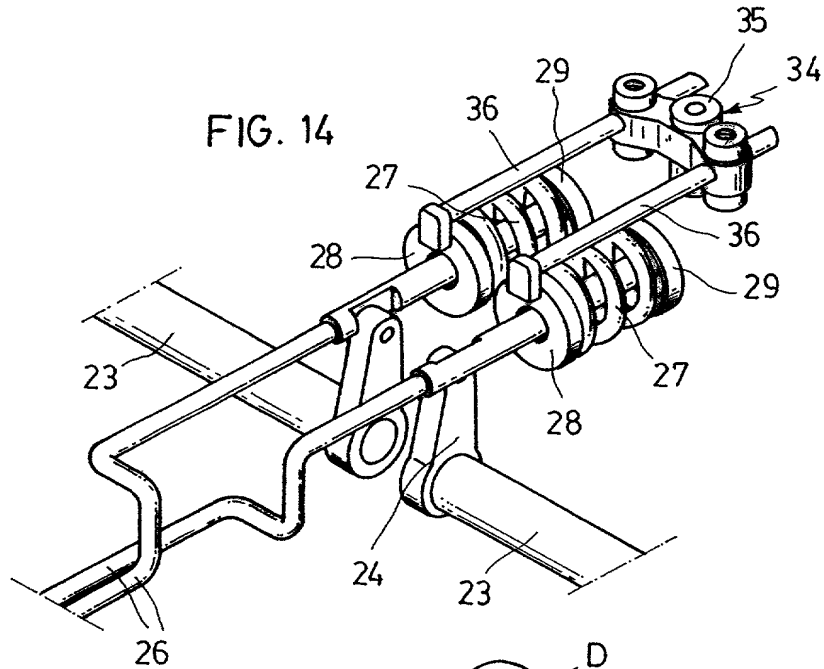


FIG. 17

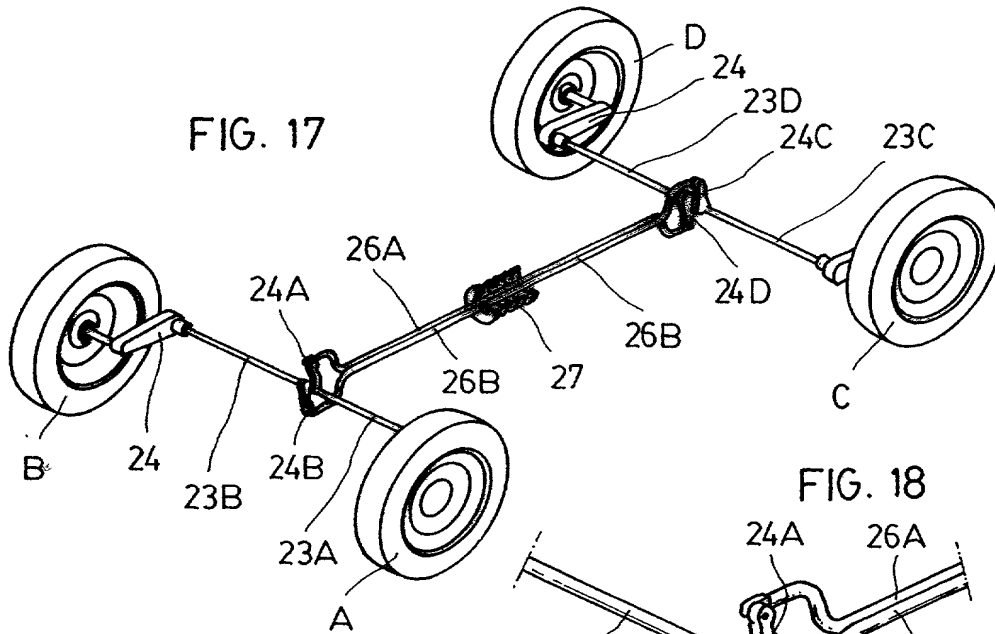


FIG. 18

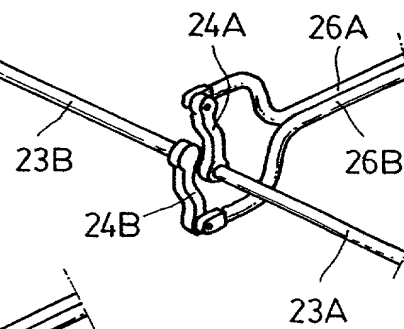


FIG. 19

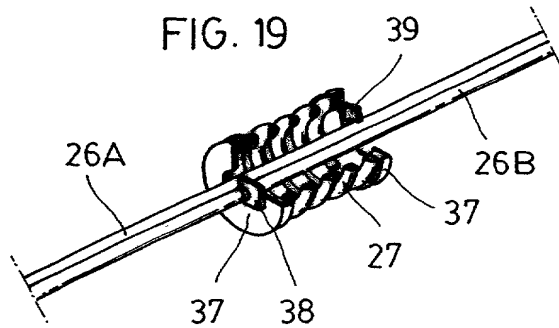


FIG. 20

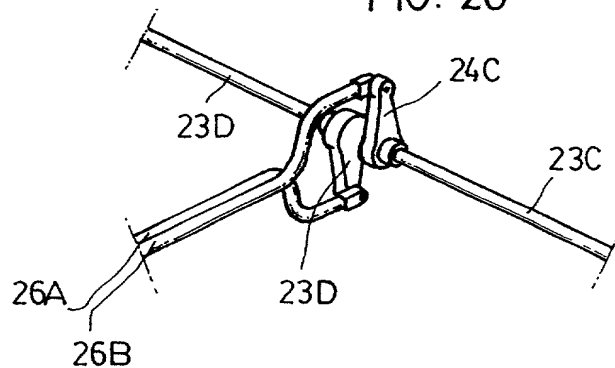


FIG. 21

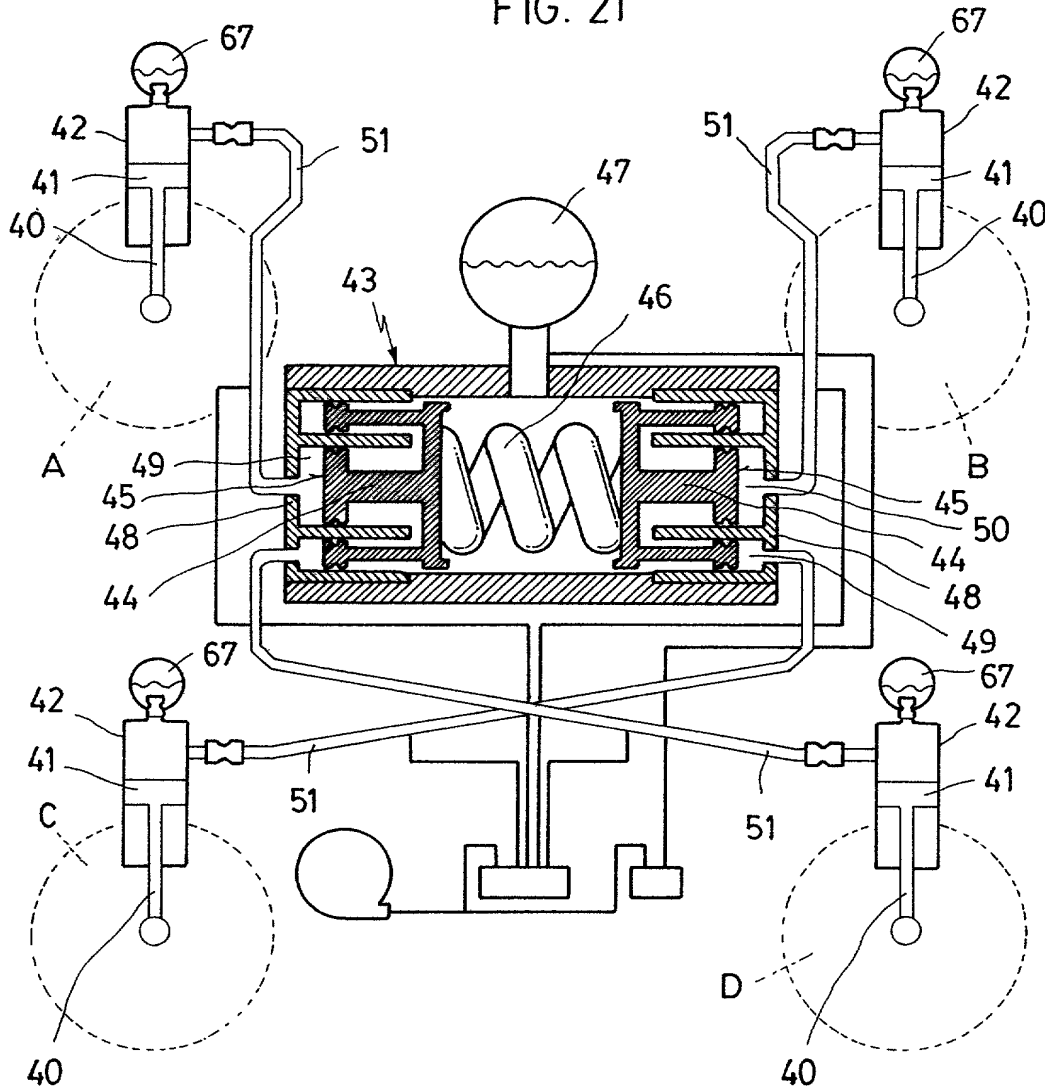


FIG. 22

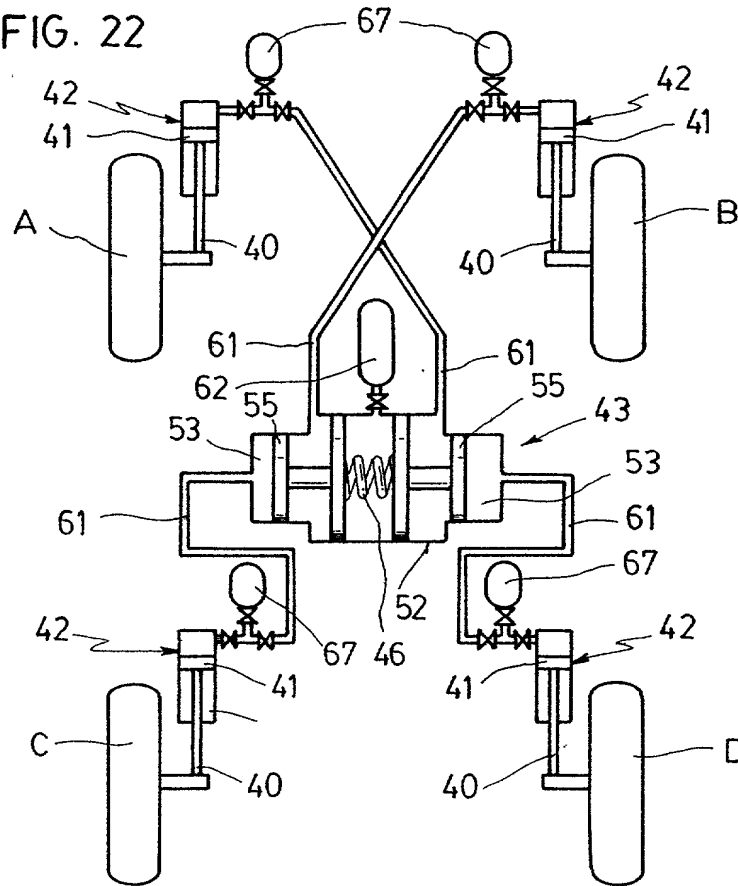
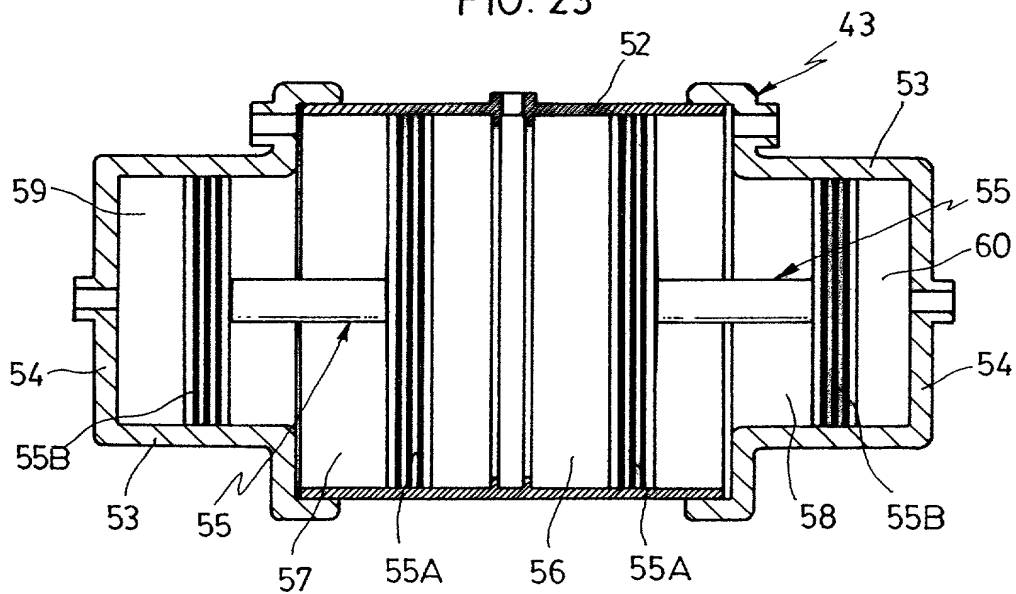


FIG. 23



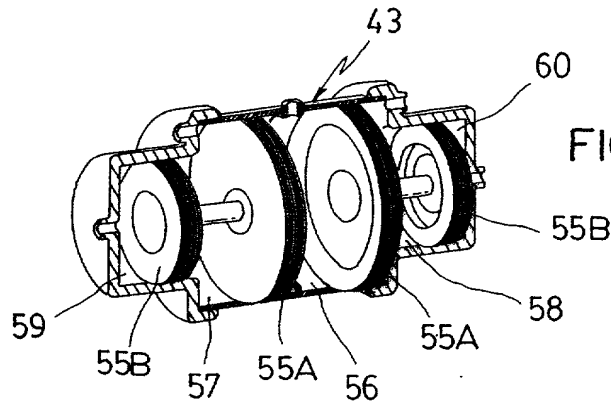


FIG. 24

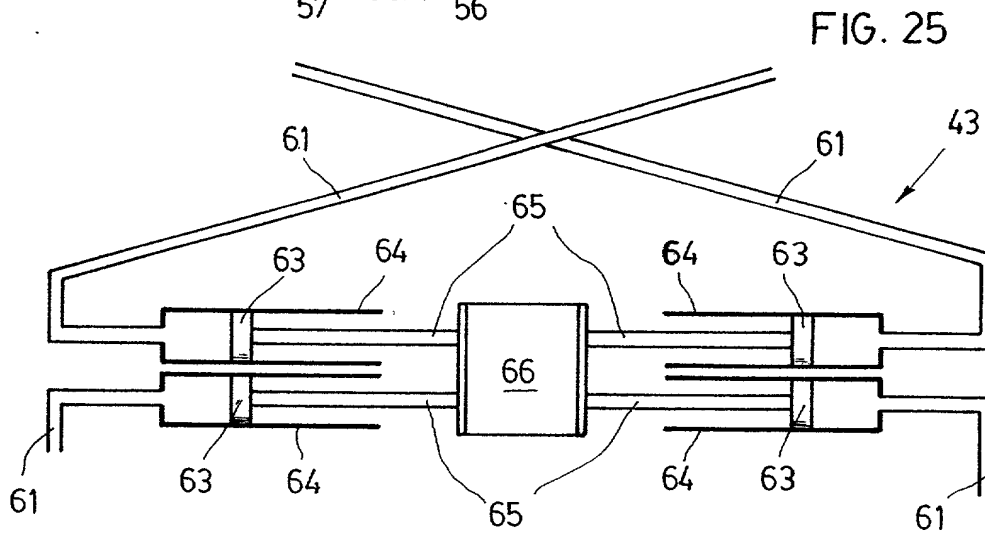


FIG. 25

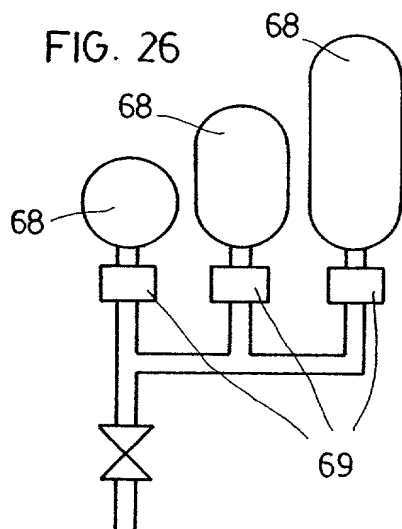


FIG. 26

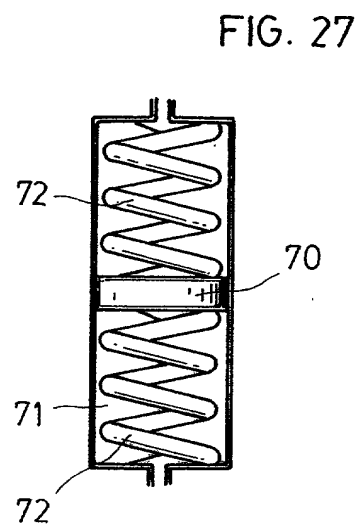


FIG. 27

DECLARATION AND POWER OF ATTORNEY FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)

As a below named inventor, I hereby declare that: My residence, mailing address, and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

"ANTIROLL AND ANTI-PITCH SYSTEM FOR A VEHICLE, AND DEVICE FOR ITS IMPLEMENTATION"

the application of which

☐ is attached hereto

OR

☒ was filed on July 27, 2000 as United States Application Number or PCT International Application Number PCT/ES00/00277 (Confirmation No. _____), and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified application, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56, including for continuation-in-part application(s), material information which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or (f), or 365(b) of any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or 365(a) of any PCT international application(s) which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application(s) for patent, inventor's or plant breeder's rights certificate(s), or any PCT international application(s) having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)
9901725

Country
Spain

Foreign Filing Date
30 July 1999

Priority Claimed	
Yes	No
<input checked="" type="checkbox"/>	<input type="checkbox"/>

I hereby claim domestic priority benefits under 35 United States Code §120 of any United States application(s), §119(e) of any United States provisional application(s), or §365(c) of any PCT International application(s) designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in a listed prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge my duty to disclose any information material to the patentability of this application as defined in 37 C.F.R. 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. or International Application Number(s)
PCT/ES00/00277

U.S. or International Filing Date
27 July 2000

Status

I hereby appoint all attorneys of **SUGHRUE MION, PLLC** who are listed under the USPTO Customer Number shown below as my attorneys to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, recognizing that the specific attorneys listed under that Customer Number may be changed from time to time at the sole discretion of Sughrue Mion, PLLC, and request that all correspondence about the application be addressed to the address filed under the same USPTO Customer Number.



23373

PATENT TRADEMARK OFFICE

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

NAME OF SOLE OR FIRST INVENTOR:			
Given Name (first and middle [if any]) <u>Josep</u>		Family Name or Surname <u>FONTDECABA BUJ</u>	
Inventor's Signature <u>Josep Fontdecaba Buj</u>		Date <u>January 7, 2002</u>	
Residence: City <u>08750 Molins de Rei (Barcelona)</u>		State <u>Spain</u>	Country <u>Spain</u>
		Citizenship <u>Spanish</u>	
Mailing Address: <u>Av. València 6-8, 08750 Molins de Rei (Barcelona), Spain</u>			
City <u>08750 Molins de Rei (Barcelona)</u>		State <u>Spain</u>	Country <u>Spain</u>
		Zip <u>08750</u>	
NAME OF SECOND INVENTOR:			
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address:			
City	State	Zip	Country
NAME OF THIRD INVENTOR:			
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address:			
City	State	Zip	Country
NAME OF FOURTH INVENTOR:			
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address:			
City	State	Zip	Country
NAME OF FIFTH INVENTOR:			
Given Name (first and middle [if any])		Family Name or Surname	
Inventor's Signature		Date	
Residence: City	State	Country	Citizenship
Mailing Address:			
City	State	Zip	Country